

Electrical accessories

Radio

434 MHz, dip-switch coding • switching contacts, max. 230 V, 5 A

Midi-transmitter • Dip-switch coding • including 12 V battery • LED function display



Designation	Channels	Description	W x H x D [mm]	Part no.
SKX1LC SKX2LC SKX4LC	1 2 4		43 x 83,5 x 15 43 x 83,5 x 15 43 x 83,5 x 15	40012142 40012143 40012145
Transmitter holder LC		black		40013415

Transmitter • Dip-switch coding • including 12 V battery • LED function display



Designation	Channels	Description	W x H x D [mm]	Part no.
SKX1GS SKX2GS SKX4GS	1 2 4		45 x 75 x 16 45 x 75 x 16 45 x 75 x 16	40017859 40017860 40017861
Transmitter holder GS		black		40017862

Transmitter • Dip-switch coding • including 9V battery • LED function display




Designation	Channels	Description	W x H x D [mm]	Part no.
SKX1 SKX2 SKX4	1 2 4		60 x 85 x 20 60 x 115 x 20 60 x 115 x 20	40010623 40010624 40010626

Electrical accessories

Radio

434 MHz, dip-switch coding • switching contacts, max. 230 V, 5 A

Receiver • Dip-switch coding

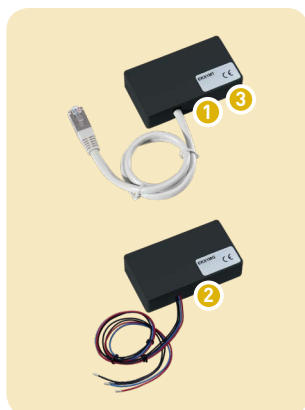

Designation	Channels	Description	W x H x D [mm]	Part no.
EKV1M	1	UBS plug connection, to be fitted with door controls TS 970 / TS 981; Voltage 12 V-24 V AC/DC	82 x 45 x 20	40014953
EKV1MG	1	Cable connection, to be fitted with TS 961 / TS 970 models up to 06.2006; Voltage 12 V-24 V AC/DC	82 x 45 x 20	40012778
EKV2M	2	UBS plug connection, to be fitted with door control TS 981; Voltage 12 V-24 V AC/DC	82 x 45 x 20	40014856

Midi-receiver • Supply voltage 230 V AC



Designation	Channels	Description	W x H x D [mm]	Part no.
EKV1MD	1		120 x 80 x 57	40012146
EKV4MD	4		120 x 80 x 57	40012147

Rod antenna



Designation	Description	Part no.
Rod antenna ANT3	With coaxial cable 3 m, for midi receiver 434 MHz, with adapter for direct connection to the receiver, length of the rod 130 mm	40000351